



Flatdecks



- CLASSIC FLATDECK W/ SINGLES (FS)
- LOW-PRO FLATDECK W/ SINGLES (LS)
- CLASSIC FLATDECK W/ DUALS (FD)
- STEP DECK TRAILER (SD)
- FLATDECK WITH HYDRAULIC DOVE (FY)
- LOW-PRO FLATDECK W/ DUALS (LD)
- LOW-PRO W/ HYDRAULIC DOVE (LY)
- 8" I-BEAM DECKOVER (F8)



Classic Flatdeck with Singles

FS

NOW EQUIPPED WITH
D
DEXTER AXLES



Lengths
20' - 40'

POWER TAIL
BY PJ TRAILERS PATENT PENDING
AVAILABLE

MONSTER
RAMPS
AVAILABLE

Standard Features

- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter EZ-Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 7,000# Electric / Spring *
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Torsion
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

- Straight Deck w/ 8' Slide-in Ramps *
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Adjustable Dovetail w/ Slide in Ramps
- 5' Adjustable Dovetail w/ Stand Up Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

Other Options


- 3/16" Diamond Plate Steel Floor & 4 D-Rings
- Mud Flaps Single Wheel Deckover
- Pipetop Rail
- Cold Weather Wiring Harness (7-Way RV)
- 16 lb. I-Beam Main Frame
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor ²
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck ²
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) ²
- Receiver Hitch
- Goodyear 14 Ply Tire **MUST ADD TO REG 14 PLY COST**
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 1 lga Diamond Plate Steel Floor & 4 D-Rings
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

Notes:

- 30' and up, upgrade to triple axle recommended
- 30' and up, upgrade to 19 lb. I-Beam recommended

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

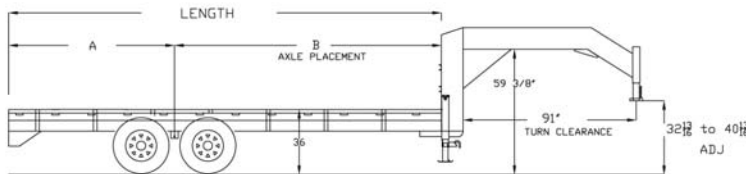

| Classic Flatdeck with Singles | | |
|-------------------------------|------|------|
| Length | A | B |
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 25' | 115" | 185" |
| 26' | 114" | 198" |
| 28' | 123" | 213" |
| 29' | 127" | 221" |

| Classic Flatdeck with Singles | | |
|-------------------------------|------|------|
| Length | A | B |
| 30' | 124" | 236" |
| 32' | 131" | 253" |
| 34' | 140" | 268" |
| 35' | 136" | 284" |
| 36' | 140" | 292" |
| 38' | 148" | 308" |
| 40' | 144" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|----------|--------------------|
| 20' | 2 - 7000 | 4440 lbs / 2014 kg |
| 22' | 2 - 7000 | 4720 lbs / 2141 kg |
| 25' | 2 - 7000 | 5100 lbs / 2313 kg |
| 28' | 2 - 7000 | 5440 lbs / 2468 kg |
| 30' | 2 - 7000 | 5900 lbs / 2676 kg |
| 30' | 3 - 7000 | 6380 lbs / 2894 kg |

TRAILER FLEX



AIR RIDE SUSPENSION AVAILABLE



Also Available with a Bumper Pull or Pintle Coupler.

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

* Standard Feature

² Special Order Option: Requires additional lead-time



Low-Pro Flatdeck with Singles

LS

NOW EQUIPPED WITH
D
DEXTER AXLES



Lengths
20' - 44'

POWER TAIL
BY PJ TRAILERS PATENT PENDING
AVAILABLE

MONSTER
RAMPS
AVAILABLE

Standard Features

- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter E-Z Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness w/ 7-Way RV Plug
- Sand Blasted, Acid Washed, Powder Coated

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

TRAILER FLEX



AIR RIDE SUSPENSION AVAILABLE



Also Available with a Bumper Pull or Pintle Coupler.

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- BP 2 5/16" Adjustable Rigid Mount (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 7,000# Electric / Spring *
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Torsion
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

- Straight Deck w/ 8' Slide-in Ramps *
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Adjustable Dovetail w/ Slide in Ramps
- 5' Adjustable Dovetail w/ Stand Up Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 F/O Monster Ramps w/HD Gussets
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 5' Dovetail w/ Power Tail (Patent Pending)

Other Options

- 2 Hydraulic Jacks
- GN Light Bar w/4 Lights (GN Only)
- Mud Flaps Single Wheel Deckover
- Rear Support Stands
- Under Frame Spare Tire and Mount
- Top Riser Toolbox
- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck ²
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 1 lga (1/8") Diamond Plate Steel Floor w/ 4 D-Rings
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Warn M12000 Winch w/ Plate, Batt, & Frt Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

* Standard Feature

² Special Order Option: Requires additional lead-time



Classic Flatdeck with Duals



NOW EQUIPPED WITH
D
DEXTER AXLES



POWER TAIL
BY PJ TRAILERS PATENT PENDING
AVAILABLE

MONSTER RAMP
AVAILABLE



Lengths
20' - 40'

Standard Features


- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

Notes:

- 25' and up includes 19 lb. I-Beam Frame, Riser & Neck
- Pintlehooks must upgrade to 19 lb. I-Beam

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

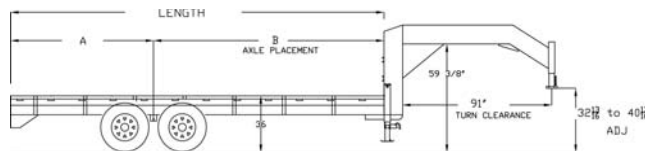

| Length | A | B |
|--------|------|------|
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 25' | 115" | 185" |
| 26' | 114" | 198" |
| 28' | 123" | 213" |
| 30' | 124" | 236" |
| 32' | 131" | 253" |

| Length | A | B |
|--------|------|------|
| 34' | 140" | 268" |
| 35' | 136" | 284" |
| 36' | 140" | 292" |
| 38' | 148" | 308" |
| 40' | 144" | 336" |

Weights

| Length | Axles | Est. Base Weight [†] |
|--------|-----------|-------------------------------|
| 20' | 2 - 10000 | 5340 lbs / 2422 kg |
| 22' | 2 - 10000 | 5480 lbs / 2486 kg |
| 25' | 2 - 10000 | 6200 lbs / 2812 kg |
| 28' | 2 - 10000 | 6860 lbs / 3112 kg |
| 30' | 2 - 10000 | 7100 lbs / 3221 kg |

| Length | Axles | Est. Base Weight [†] |
|--------|-----------|-------------------------------|
| 32' | 2 - 10000 | 7320 lbs / 3320 kg |
| 34' | 2 - 10000 | 7640 lbs / 3465 kg |
| 36' | 2 - 10000 | 8020 lbs / 3638 kg |
| 38' | 2 - 10000 | 8500 lbs / 3856 kg |
| 40' | 2 - 10000 | 8920 lbs / 4046 kg |

[†]Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring *
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Elec / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000#, 14ply Air / Spring
- (2) 12,000#, 14ply Elec / Spring
- (2) 12,000#, 14ply Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

- Straight Deck w/ 8' Slide-in Ramps *
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle ²
- AL-KO Axles ²
- Hutch suspension H9700-Underslung Triple Axle ²
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor ²
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck ²
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox ²
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings (Cut Fenders)
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Fr T/bx
- Ramp Support Arms
- * Standard Feature
- ² Special Order Option: Requires additional lead-time



Also Available with
a Bumper Pull or
Pintle Coupler.



Step Deck Trailer



NOW EQUIPPED WITH
D
DEXTER AXLES



POWER TAIL
BY PJ TRAILERS PATENT PENDING
AVAILABLE

MONSTER RAMP
AVAILABLE



Lengths
41' - 53'

Standard Features

- 30,000 lb. G.V.W.R.
- 12,000 lb. x 2 G.A.W.R.
- 2 - 25k Jost 2x Drop Leg Jacks
- 2 - Dexter Oil Bath Brake Axles (12,000 lb.)
- Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 8' Ramps w/ Holders
- 12" x 22 lb. I-Beam Main Frame
- 3" Channel Crossmembers 12" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated
- Frame Bridging

Notes:

- MAX GVWR 40,000 with 15k or 16k Axles

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.



AIR RIDE SUSPENSION AVAILABLE

Coupler Options

- 11' Step *
- 10' Step

Axle Options

- (2) 12,000# Axles Electric / Spring *
- (2) 12,000# Axles Elec/Hyd Disk (1,600 PSI Pump) / Air Ride
- (2) 12,000# Axles Elec/Hyd Disk (1,600 PSI Pump) / Spring
- (3) 12,000# Axles Electric / Spring
- (3) 12,000# Axles Elec/Hyd Disk (1,600 PSI)/Air Ride w/ Lift Axle
- (3) 12,000# Axles Elec/Hyd Disk (1,600 PSI) / Spring
- (2) 12,000# w/ Load Range G 14 ply Tires Electric / Spring
- (2) 12,000# w/ Ld Rg G 14 ply Elec/Hyd Disk (1,600 PSI)/Spring
- (2) 12,000# w/ Ld Rg G 14 ply Electric / Spring
- (3) 12,000# w/ Ld Rg G 14 ply Elec/Hyd Disk (1,600 PSI)/Spring
- (2) 12k Dexter Axles Electric / Spring
- (2) 15,000# DEXTER Elec/Hyd Drum (1,000 PSI Pump) / Air Ride
- (2) 15,000# DEXTER Elec/Hyd Drum (1,000 PSI Pump) / Spring
- (3) 15,000# DEXTER Elec/Hyd Drum (1,000 PSI Pump) / Spring
- (2) 16000# 235/75R17.5 Tires Air / Air Ride
- (2) 16000# 235/75R17.5 Tires Air / Spring
- (2) 16000# 235/75R17.5 Tires Electric / Spring
- (3) 16000# 235/75R17.5 Tires Air / Air Ride
- (3) 16000# 235/75R17.5 Tires Air / Air Ride w/ Lift Axle
- (3) 16000# 235/75R17.5 Tires Air / Spring
- (3) 16000# 235/75R17.5 Tires Electric / Spring

Tail Options

- Straight Deck w/ 8' Slide-in Ramps *
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps w/HD Gusset
- 5' Ctr Pop-up 2 Flip-over Ramps w/HD 3/16 Gusset
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 F/O Monster Ramps w/HD Gussets
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 10' Hydraulic Dovetail
- 5' Dovetail w/ Power Tail (Patent Pending)

Other Options

- Battery Charger 12V
- Cold Weather Wiring Harness (7-Way RV)
- Hutch susp. H9700-Underslung Tandem Axle²
- >>> Upgrade to AL-KO Axles <<<
- Hutch susp. H9700-Underslung Triple Axle²
- Plate for Winch
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor
- Under Frame Tie Down Flat
- Low Profile (Pierced Beam)
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings (Cut Fenders)
- Diamond Plate Ramp Bottoms
- Torque Tube
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

* Standard Feature

² Special Order Option: Requires additional lead-time



Flatdeck with Hydraulic Dove




Lengths
30' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridging
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

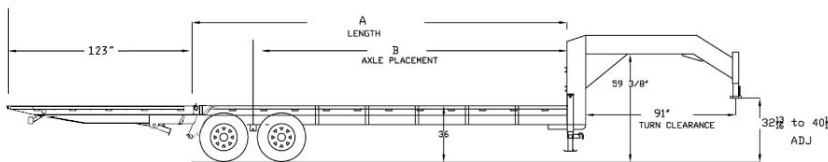

| Flatdeck with Hydraulic Dove | | |
|------------------------------|------|------|
| Length | A | B |
| 28' | 228" | 192" |
| 30' | 252" | 216" |
| 32' | 276" | 240" |
| 34' | 300" | 264" |
| 35' | 312" | 276" |
| 36' | 324" | 288" |
| 38' | 348" | 312" |
| 40' | 372" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 30' | 2 - 10000 | 7860 lbs / 3565 kg |
| 32' | 2 - 10000 | 8200 lbs / 3719 kg |
| 34' | 2 - 10000 | 8520 lbs / 3865 kg |
| 36' | 2 - 10000 | 8700 lbs / 3946 kg |
| 38' | 2 - 10000 | 9020 lbs / 4091 kg |
| 40' | 2 - 10000 | 9320 lbs / 4227 kg |



AIR RIDE SUSPENSION AVAILABLE

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring *
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (2) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (3) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12,000# Load Range G Tires Air / Spring
- (2) 12,000# Load Range G Tires Electric / Spring
- (2) 12,000# Load Range G Tires Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring
- (2) 16000# 215/75R17.5 Tires Air / Spring
- (2) 16000# 215/75R17.5 Tires Electric / Spring
- Consult Your Sales Rep. for Additional Available Axles

Tail Options

10' Hydraulic Dovetail *

Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle ²
- AL-KO Axles ²
- Hutch suspension H9700-Underslung Triple Axle ²
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck ²
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox ²
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

* Standard Feature

² Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.



Low-Pro Flatdeck with Duals

LD

NOW EQUIPPED WITH
D
DEXTER AXLES



POWER TAIL
BY PJ TRAILERS PATENT PENDING
AVAILABLE

MONSTER RAMP
AVAILABLE

LIFETIME
LED
LIGHTS

Lengths
20' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 2" x 6" Square Tubing
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Tongue (to 27')
- 12" x 14 lb. I-Beam Main Frame (to 27')
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted
- Acid Washed

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

Coupler Options

- GN 2 5/16" Round (25,000 lb.) *
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

Axle Options


- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring *
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Elec / Spring
- (3) 10,000# Elec / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring

Tail Options

- Straight Deck w/ 2 Slide-in Ramps *
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

Other Options

- 6" Taller GN Riser
- 19 lb. I-Beam MainFrame & Neck
- 22 lb. I-Beam MainFrame & Neck (from 19 lb.)
- 1/2" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb. rating)

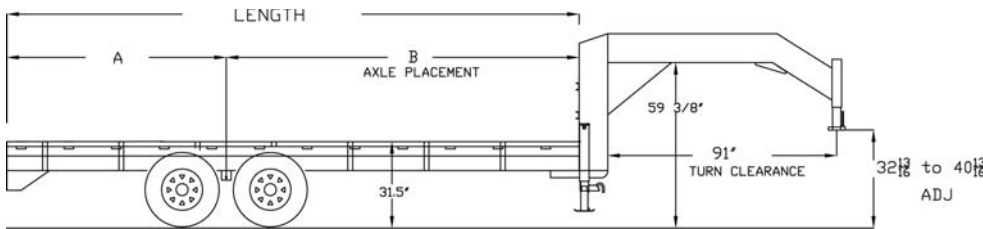

| Length | A | B |
|--------|------|------|
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 25' | 115" | 185" |
| 26' | 114" | 198" |
| 28' | 123" | 213" |
| 30' | 124" | 236" |
| 32' | 131" | 253" |

| Length | A | B |
|--------|------|------|
| 34' | 140" | 268" |
| 35' | 136" | 284" |
| 36' | 140" | 292" |
| 38' | 148" | 308" |
| 40' | 144" | 336" |

Weights

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 20' | 2 - 10000 | 5780 lbs / 2622 kg |
| 22' | 2 - 10000 | 5920 lbs / 2685 kg |
| 25' | 2 - 10000 | 6300 lbs / 2858 kg |
| 28' | 2 - 10000 | 6840 lbs / 3103 kg |
| 30' | 2 - 10000 | 7240 lbs / 3284 kg |

| Length | Axles | Est. Base Weight† |
|--------|-----------|--------------------|
| 32' | 2 - 10000 | 7560 lbs / 3429 kg |
| 34' | 2 - 10000 | 7820 lbs / 3547 kg |
| 36' | 2 - 10000 | 8200 lbs / 3719 kg |
| 38' | 2 - 10000 | 8520 lbs / 3865 kg |
| 40' | 2 - 10000 | 8780 lbs / 3983 kg |

Notes:

- 30' and up includes Frame Bridging
- * Standard Feature
- ‡ Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.

TRAILER FLEX



AIR RIDE SUSPENSION AVAILABLE

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights



Low-Pro with Hydraulic Dove



NOW EQUIPPED WITH
D
DEXTER AXLES



Lengths
30' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox *
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring *
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring

Tail Options

- 10' Hydraulic Dovetail *

Other Options


- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle ²
- AL-KO Axles ²
- Hutch suspension H9700-Underslung Triple Axle ²
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck ²
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox ²
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

* Standard Feature

² Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.

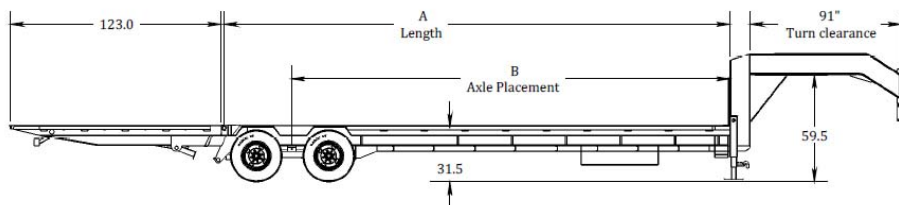

| LowPro with Hydraulic Dove | | |
|----------------------------|------|------|
| Length | A | B |
| 28' | 228" | 192" |
| 30' | 252" | 216" |
| 32' | 276" | 240" |
| 34' | 300" | 264" |
| 35' | 312" | 276" |
| 36' | 324" | 288" |
| 38' | 348" | 312" |
| 40' | 372" | 336" |

Weights

| Length | Axles | Est. Base Weight _t |
|--------|-----------|-------------------------------|
| 30' | 2 - 10000 | 7840 lbs / 3556 kg |
| 32' | 2 - 10000 | 8080 lbs / 3665 kg |
| 34' | 2 - 10000 | 8400 lbs / 3810 kg |
| 36' | 2 - 10000 | 8700 lbs / 3946 kg |



† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights



8" I-Beam Deckover

F8

NOW EQUIPPED WITH
D
DEXTER AXLES



MONSTER
RAMPS
AVAILABLE




Lengths
16' - 26'

Standard Features

- Front Toolbox (GN Only)
- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Adjustable Ball Coupler
- Safety Chains
- 1 - Drop Leg Jack (10,000 lb.)
- 2 - Dexter EZ-Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray
- 6' 6" Slide in Ramps w/ Holders
- 8" x 10 lb. I-Beam Tongue
- 8" x 10 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 96" Wide Deck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

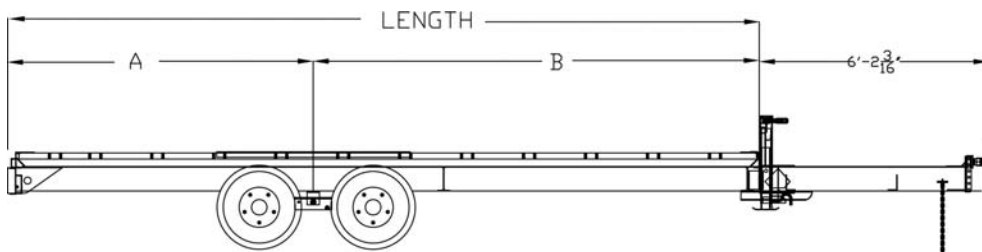

| 8" I-Beam Deckover | | |
|--------------------|------|------|
| Length | A | B |
| 16' | 77" | 115" |
| 18' | 86" | 130" |
| 20' | 92" | 148" |
| 22' | 102" | 162" |
| 24' | 112" | 176" |
| 26' | 114" | 198" |

Also Available with a Gooseneck Coupler



Weights

| Length | Axles | Est. Base Weight† |
|--------|----------|--------------------|
| 16' | 2 - 7000 | 3200 lbs / 1451 kg |
| 18' | 2 - 7000 | 3400 lbs / 1542 kg |
| 20' | 2 - 7000 | 3600 lbs / 1633 kg |
| 20' GN | 2 - 7000 | 4100 lbs / 1860 kg |

| Length | Axles | Est. Base Weight† |
|--------|----------|--------------------|
| 22' | 2 - 7000 | 3820 lbs / 1733 kg |
| 24' | 2 - 7000 | 4060 lbs / 1842 kg |
| 26' | 2 - 7000 | 4340 lbs / 1969 kg |

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) *
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Round (25,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 5,200# Electric / Spring
- (3) 5,200# Electric / Spring
- (2) 7,000# Electric / Spring *
- (2) 7,000# Electric / Torsion
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (3) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Oil Bath Axles w / 235-80 Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric / Spring

Tail Options

- Straight Deck w/ 6'6" Slide-in Ramps *
- 3' Dovetail w/ 5' Slide-in Ramps (18' and up)
- 3' Dovetail w/ 2, 16"x60" Foldup Ramps
- 3' Dovetail w/ 3, 16"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66" Foldup Ramps
- 5' dove with 2 Flipover Ramps (Must Have R option)
- 3' Dovetail w/ 3 31"x66" Foldup Ramps
- 3' Dovetail w/ 2 16"x60" Dbl Hinge Foldup Ramps
- 5' Dove w/ 5' Slide-in Ramps (Must Have R option)
- 3' Dovetail w/ 3 16"x60" Dbl Hinge Foldup Ramps
- 4' Dove with 2 Flipover Ramps
- 4' Dove with 3 Flipover Ramps
- 5' Dove with 3 Flipover Ramps (Must Have R option)
- 5' Dove 3 31"x66" Fld Up Rmp.(Must Have R opt.)
- 3' Dovetail w/ Split Heavy Duty Gate
- 3' Dovetail w/ Heavy Duty Gate
- 4' Dove with 4ft. Monster Ramps
- 5' Dove 2 31"x66" Fld Up Rmp.(Must Have R opt.)

Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Decking
- 9,990 G.V.W.R.
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- 2nd Jack
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- Mount Only for Spare Tire
- 1/4" Diamond Plate Steel Floor
- Steel Floor & 4 D-Rings
- Front Toolbox (Bumper Pull)
- 102" Deck Width
- Rear Support Jacks (Dovetail and 96"Only)
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)

* Standard Feature

² Special Order Option: Requires additional lead-time

POWER TAIL

PATENT PENDING



The Power Tail is a hydraulic powered trailer tail that replaces typical trailer ramps with a 100% powered ramp system. This allows you to make the trailer ready to load and unload at the touch of a button. The tail rotates a full 180 degrees to serve both as a tail for loading and deck for storing cargo.

The PJ Power Tail is easier, safer, faster, and more reasonably priced than anything else on the market.

Never Lift Another Ramp

Gone are the days of physically flipping multiple ramps then carefully adjusting their position to load your equipment. With the touch of a button you will be able to quickly raise and lower the entire tail, saving your back and your time

Tail Lays Flat to Extend the Deck

In the closed position the tail is completely flat, allowing equipment & cargo to be loaded on top of the diamond plate on the Power Tail. This also reduces wind drag significantly compared to stand-up ramps.

Confidence Inspiring & Safe

The super wide Power Tail gives you the confidence to load and unload equipment without the fear of missing a ramp. The angle cross-members are used on both the dovetail and Power Tail to maximize traction in all-weather situations. Also, the knife edge tail eliminates the initial "bump" when loading that can cause wheel spin.

Shorter and Lighter

Since the tail folds flush to the deck, you don't have to worry about the 4-5 ft of tail overhang that is common on hydraulic dovetails. This fold-over tail and single cylinder design keep the Power Tail short and relatively light to maximize payload capacity. This allows the Power Tail to be installed on short 14k single wheel goosenecks (20 feet) all the way up to triple axle stepdeck trailers as long as 53 feet.

Smart & Highly Efficient Design

The Power Tail (patent pending) uses a single hydraulic cylinder to rotate the tail a full 180 degrees. This ingenious tail design is very mechanically efficient, using just a few moving parts with no wasted movement. This greatly reduces the overall cost and weight of the Power Tail.



Other Benefits

- Self-cleaning angle dovetail & tail allows dirt to easily pass through
- Knife-edge tail eases the loading of small wheel/low clearance vehicles & equipment
- Heavy duty tail built for loading heavy equipment
- Diamond plate tail cover offers snag-free platform for cargo
- Includes self-contained KTI hydraulic pump system with wired remote (wireless remote available)
- Tail is spring assisted for smooth operation
- Faster than hydraulic dovetail
- Quieter than flip-over ramps (stops ramp bounce)
- Includes ramp support arms for upright storage
- Tail evenly distributes weight when loading, preventing the tail from "burying up" or damaging turf
- Includes an integrated flush-mount 110v battery charger to plug into wall outlet
- Works with all available suspension choices (Air, Torsion, Spring, Hutch)

Power Tail Specifications

Models Available: FS, FD, LD, & SD

Tail footprint: 72" long x 94" wide tail footprint

Tail cover material: 11 gauge diamond plate

Cross-members: 2" x 2" x 3/16" angle

Ramp Gussets: 10 gauge formed steel

Total Estimated Weight of Power Tail Option: 1100 lbs
(includes tail, box, cylinder, battery, etc)



Models with Power Tail Option Available

FS



Classic Flatdeck
with Singles (FS)

LS



Low-Pro Flatdeck
with Singles (LS)

FD



Classic Flatdeck
with Duals (FD)

LD



Low-Pro Flatdeck
with Duals (LD)

SD



Step Deck
Trailer (SD)

Flatdeck Options Guide

(some options not shown, please view the product page for a list of all options)

Tail Options



Straight Deck w/ 8' Slide-in Ramps



5' Dovetail w/ 2 Flip-Over Ramps



5' Center Pop-up Dove w/ 2 Flip-Over Ramps



5' Dovetail w/ 3 Flip-Over Ramps



MONSTER
RAMPS

Color Options



Black Powder Coat



Eq. Yellow Powder Coat



Grey Powder Coat



White Powder Coat



Red Powder Coat

Other Options



12"oc Crossmembers



D-Rings



Rough Oak Floor



Weld On Strap Ratchets (2)



Underframe Tie Down Flat



72" Axle Spread



Sliding Strap Ratchets



Steel Floor & 4 D-rings



2 Speed Jacks



Diamond Plate Ramp Bottoms



Torque Tube



Deck On The Neck



Side-Mount Toolbox



Wood Rack



TRAILER FLEX TrailerFlex Air Ride Suspension



PJ TRAILERS

- #1 Professional Grade Open Trailer Manufacturer
- Broad Line of Dumps, Flatdecks, Utilities, Tilts & Equipment Trailers
- Over 300 Independent PJ Trailers Dealer Locations in the US & Canada

Visit Us Online at www.pjtrailers.com