



## ***Flatdecks***



CLASSIC FLATDECK W/ SINGLES (FS)  
LOW-PRO FLATDECK W/ SINGLES (LS)  
CLASSIC FLATDECK W/ DUALS (FD)  
STEP DECK TRAILER (SD)  
FLATDECK WITH HYDRAULIC DOVE (FY)  
LOW-PRO FLATDECK W/ DUALS (LD)  
LOW-PRO W/ HYDRAULIC DOVE (LY)  
8" I-BEAM DECKOVER (F8)



# Classic Flatdeck with Singles

# FS

NOW EQUIPPED WITH  
**DEXTER AXLES**



**Lengths**  
20' - 40'

## Standard Features


- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter EZ-Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## Notes:

- 30' and up, upgrade to triple axle recommended
- 30' and up, upgrade to 19 lb. I-Beam recommended

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

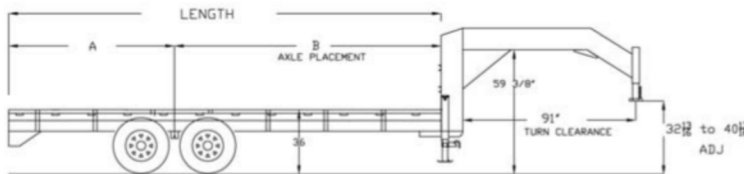

Classic Flatdeck with Singles		
Length	A	B
20'	92"	148"
22'	102"	162"
24'	112"	176"
25'	115"	185"
26'	114"	198"
28'	123"	213"
29'	127"	221"

Classic Flatdeck with Singles		
Length	A	B
30'	124"	236"
32'	131"	253"
34'	140"	268"
35'	136"	284"
36'	140"	292"
38'	148"	308"
40'	144"	336"

## Weights

Length	Axles	Est. Base Weight:
20'	2 - 7000	4440 lbs / 2014 kg
22'	2 - 7000	4720 lbs / 2141 kg
25'	2 - 7000	5100 lbs / 2313 kg
28'	2 - 7000	5440 lbs / 2468 kg
30'	2 - 7000	5900 lbs / 2676 kg
30'	3 - 7000	6380 lbs / 2894 kg

**TRAILER FLEX**



**AIR RIDE SUSPENSION AVAILABLE**



Also Available with a  
Bumper Pull or Pintle  
Coupler.

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Torsion
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

## Tail Options

- Straight Deck w/ 8' Slide-in Ramps \*
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Adjustable Dovetail w/ Slide in Ramps
- 5' Adjustable Dovetail w/ Stand Up Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

## Other Options

- 3/16" Diamond Plate Steel Floor & 4 D-Rings
- Mud Flaps Single Wheel Deckover
- Pipetop Rail
- Cold Weather Wiring Harness (7-Way RV)
- 16 lb. I-Beam Main Frame
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor <sup>2</sup>
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) <sup>2</sup>
- Receiver Hitch
- Goodyear 14 Ply Tire MUST ADD TO REG 14 PLY COST
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 1 lga Diamond Plate Steel Floor & 4 D-Rings
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



# Low-Pro Flatdeck with Singles

# LS

NOW EQUIPPED WITH  
**DEXTER AXLES**



**POWER TAIL**  
BY PJ TRAILERS PATENT PENDING  
AVAILABLE

**MONSTER RAMP**  
AVAILABLE



**Lengths**  
20' - 44'

## Standard Features

- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter E-Z Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness w/ 7-Way RV Plug
- Sand Blasted, Acid Washed, Powder Coated

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

**TRAILER FLEX**



**AIR RIDE SUSPENSION AVAILABLE**



Also Available with a  
Bumper Pull or Pintle  
Coupler.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- BP 2 5/16" Adjustable Rigid Mount (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Torsion
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

## Tail Options

- Straight Deck w/ 8' Slide-in Ramps \*
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Adjustable Dovetail w/ Slide in Ramps
- 5' Adjustable Dovetail w/ Stand Up Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 F/O Monster Ramps w/HD Gussets
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 5' Dovetail w/ Power Tail (Patent Pending)

## Other Options

- 2 Hydraulic Jacks
- GN Light Bar w/4 Lights (GN Only)
- Mud Flaps Single Wheel Deckover
- Rear Support Stands
- Under Frame Spare Tire and Mount
- Top Riser Toolbox
- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 1 lga (1/8") Diamond Plate Steel Floor w/ 4 D-Rings
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Warn M1 2000 Winch w/ Plate, Batt, & Frt Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time





# Classic Flatdeck with Duals



NOW EQUIPPED WITH  
**DEXTER AXLES**



**POWER TAIL**  
BY PJ TRAILERS PATENT PENDING  
AVAILABLE

**MONSTER RAMP**  
AVAILABLE



**Lengths**  
20' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## Notes:


- 25' and up includes 19 lb. I-Beam Frame, Riser & Neck
- Pintlehooks must upgrade to 19 lb. I-Beam

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.



AIR RIDE SUSPENSION AVAILABLE

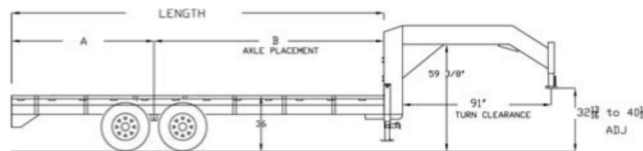

Classic Flatdeck with Duals		
Length	A	B
20'	92"	148"
22'	102"	162"
24'	112"	176"
25'	115"	185"
26'	118"	194"
28'	128"	213"
30'	134"	230"
32'	141"	243"

Classic Flatdeck with Duals		
Length	A	B
34'	149"	258"
35'	156"	264"
36'	160"	270"
38'	168"	288"
40'	174"	306"

## Weights

Length	Axles	Est. Base Weight:
20'	2 - 10000	5340 lbs / 2422 kg
22'	2 - 10000	5480 lbs / 2486 kg
25'	2 - 10000	6200 lbs / 2812 kg
28'	2 - 10000	6860 lbs / 3112 kg
30'	2 - 10000	7100 lbs / 3221 kg

Length	Axles	Est. Base Weight:
32'	2 - 10000	7320 lbs / 3320 kg
34'	2 - 10000	7640 lbs / 3465 kg
36'	2 - 10000	8020 lbs / 3638 kg
38'	2 - 10000	8500 lbs / 3856 kg
40'	2 - 10000	8920 lbs / 4046 kg

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring \*
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Elec / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000#, 14ply Air / Spring
- (2) 12,000#, 14ply Elec / Spring
- (2) 12,000#, 14ply Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring
- Consult Your Sales Rep. for Additional Available Axles

## Tail Options

- Straight Deck w/ 8' Slide-in Ramps \*
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle <sup>2</sup>
- AL-KO Axles <sup>2</sup>
- Hutch suspension H9700-Underslung Triple Axle <sup>2</sup>
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor <sup>2</sup>
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox <sup>2</sup>
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings (Cut Fenders)
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/bx
- Ramp Support Arms
- \* Standard Feature
- <sup>2</sup> Special Order Option: Requires additional lead-time



Also Available with  
a Bumper Pull or  
Pintle Coupler.

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights





# Step Deck Trailer



NOW EQUIPPED WITH  
**D**  
DEXTER AXLES



**POWER TAIL**  
BY PJ TRAILERS PATENT PENDING  
AVAILABLE

**MONSTER  
RAMPS**  
AVAILABLE



**Lengths**  
41' - 53'

## Standard Features

- 30,000 lb. G.V.W.R.
- 12,000 lb. x 2 G.A.W.R.
- 2 - 25k Jost 2x Drop Leg Jacks
- 2 - Dexter Oil Bath Brake Axles (12,000 lb.)
- Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 8' Ramps w/ Holders
- 12" x 22 lb. I-Beam Main Frame
- 3" Channel Crossmembers 12" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated
- Frame Bridging

### Notes:

- MAX GVWR 40,000 with 15k or 16k Axles

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.



AIR RIDE SUSPENSION AVAILABLE

## Coupler Options

- 11' Step \*
- 10' Step

## Axle Options

- (2) 12,000# Axles Electric / Spring \*
- (2) 12,000# Axles Elec/Hyd Disk (1,600 PSI Pump) / Air Ride
- (2) 12,000# Axles Elec/Hyd Disk (1,600 PSI Pump) / Spring
- (3) 12,000# Axles Electric / Spring
- (3) 12,000# Axles Elec/Hyd Disk (1,600 PSI) / Air Ride w/ Lift Axle
- (3) 12,000# Axles Elec/Hyd Disk (1,600 PSI) / Spring
- (2) 12,000# w/ Load Range G 14 ply Tires Electric / Spring
- (2) 12,000# w/ Ld Rg G 14 ply Elec/Hyd Disk (1,600 PSI) / Spring
- (2) 12,000# w/ Ld Rg G 14 ply Electric / Spring
- (3) 12,000# w/ Ld Rg G 14 ply Elec/Hyd Disk (1,600 PSI) / Spring
- (2) 12k Dexter Axles Electric / Spring
- (2) 15,000# DEXTER Elec/Hyd Drum (1,000 PSI Pump) / Air Ride
- (2) 15,000# DEXTER Elec/Hyd Drum (1,000 PSI Pump) / Spring
- (3) 15,000# DEXTER Elec/Hyd Drum (1,000 PSI Pump) / Spring
- (2) 16000# 235/75R17.5 Tires Air / Air Ride
- (2) 16000# 235/75R17.5 Tires Air / Spring
- (2) 16000# 235/75R17.5 Tires Electric / Spring
- (3) 16000# 235/75R17.5 Tires Air / Air Ride
- (3) 16000# 235/75R17.5 Tires Air / Air Ride w/ Lift Axle
- (3) 16000# 235/75R17.5 Tires Air / Spring
- (3) 16000# 235/75R17.5 Tires Electric / Spring

## Tail Options

- Straight Deck w/ 8' Slide-in Ramps \*
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps w/HD Gusset
- 5' Ctr Pop-up 2 Flip-over Ramps w/HD 3/16 Gusset
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 F/O Monster Ramps w/HD Gussets
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 10' Hydraulic Dovetail
- 5' Dovetail w/ Power Tail (Patent Pending)

## Other Options

- Battery Charger 12V
- Cold Weather Wiring Harness (7-Way RV)
- Hutch susp. H9700-Underslung Tandem Axle<sup>2</sup>
- >>> Upgrade to AL-KO Axles <<<
- Hutch susp. H9700-Underslung Triple Axle<sup>2</sup>
- Plate for Winch
- Douglas Fir Lumber
- ¼" Diamond Plate Steel Floor
- Under Frame Tie Down Flat
- Low Profile (Pierced Beam)
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- Side Mount Wood Rack
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings ( Cut Fenders )
- Diamond Plate Ramp Bottoms
- Torque Tube
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- HD Semi Trailer 2x Jacks (25,000 lb.)
- Ramp Support Arms

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



# Flatdeck with Hydraulic Dove




**Lengths**  
30' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridging
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

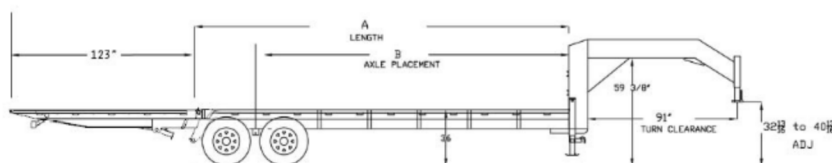

Flatdeck with Hydraulic Dove		
Length	A	B
28'	228"	192"
30'	252"	216"
32'	276"	240"
34'	300"	264"
35'	312"	276"
36'	324"	288"
38'	348"	312"
40'	372"	336"

## Weights

Length	Axles	Est. Base Weight:
30'	2 - 10000	7860 lbs / 3565 kg
32'	2 - 10000	8200 lbs / 3719 kg
34'	2 - 10000	8520 lbs / 3865 kg
36'	2 - 10000	8700 lbs / 3946 kg
38'	2 - 10000	9020 lbs / 4091 kg
40'	2 - 10000	9320 lbs / 4227 kg



**AIR RIDE SUSPENSION AVAILABLE**

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring \*
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (2) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (3) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12,000# Load Range G Tires Air / Spring
- (2) 12,000# Load Range G Tires Electric / Spring
- (2) 12,000# Load Range G Tires Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring
- (2) 16000# 215/75R17.5 Tires Air / Spring
- (2) 16000# 215/75R17.5 Tires Electric / Spring

- Consult Your Sales Rep. for Additional Available Axles

## Tail Options

- 10' Hydraulic Dovetail \*

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle <sup>2</sup>
- AL-KO Axles <sup>2</sup>
- Hutch suspension H9700-Underslung Triple Axle <sup>2</sup>
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox <sup>2</sup>
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/bax

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.



# Low-Pro Flatdeck with Duals

# LD

NOW EQUIPPED WITH  
**DEXTER AXLES**



**POWER TAIL**  
BY PJ TRAILERS PATENT PENDING  
AVAILABLE

**MONSTER RAMP**  
AVAILABLE

LIFETIME  
**LED**  
LIGHTS


**Lengths**  
20' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 2" x 6" Square Tubing
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Tongue (to 27')
- 12" x 14 lb. I-Beam Main Frame (to 27')
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted
- Acid Washed

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

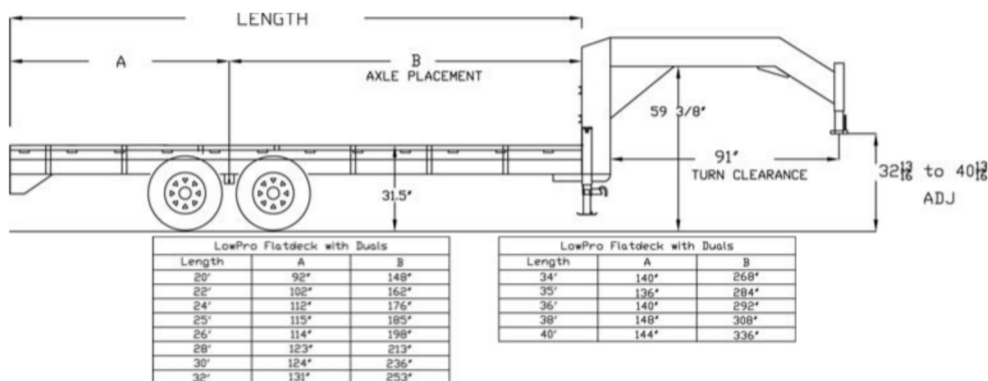

## Weights

Length	Axles	Est. Base Weight <sup>†</sup>
20'	2 - 10000	5780 lbs / 2622 kg
22'	2 - 10000	5920 lbs / 2685 kg
25'	2 - 10000	6300 lbs / 2858 kg
28'	2 - 10000	6840 lbs / 3103 kg
30'	2 - 10000	7240 lbs / 3284 kg

Length	Axles	Est. Base Weight <sup>†</sup>
32'	2 - 10000	7560 lbs / 3429 kg
34'	2 - 10000	7820 lbs / 3547 kg
36'	2 - 10000	8200 lbs / 3719 kg
38'	2 - 10000	8520 lbs / 3865 kg
40'	2 - 10000	8780 lbs / 3983 kg

<sup>†</sup>Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) \*
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring \*
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Elec / Spring
- (3) 10,000# Elec / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring

## Tail Options

- Straight Deck w/ 2 Slide-in Ramps \*
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

## Other Options

- 6" Taller GN Riser
- 19 lb. I-Beam MainFrame & Neck
- 22 lb. I-Beam MainFrame & Neck (from 19 lb.)
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb. rating)

## Notes:

- \* 30' and up includes Frame Bridging
- \* Standard Feature
- <sup>2</sup> Special Order Option: Requires additional lead-time



Also Available with a  
Bumper Pull or Pintle  
Coupler.

**TRAILER FLEX**



AIR RIDE SUSPENSION AVAILABLE





# Low-Pro with Hydraulic Dove



NOW EQUIPPED WITH  
**D**  
DEXTER AXLES



**Lengths**  
30' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring \*
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring

## Tail Options

- 10' Hydraulic Dovetail \*

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle <sup>2</sup>
- AL-KO Axles <sup>2</sup>
- Hutch suspension H9700-Underslung Triple Axle <sup>2</sup>
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox <sup>2</sup>
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



Also Available with a  
Bumper Pull or Pintle  
Coupler.

## Weights

Length	Axles	Est. Base Weight
30'	2 - 10000	7840 lbs / 3556 kg
32'	2 - 10000	8080 lbs / 3665 kg
34'	2 - 10000	8400 lbs / 3810 kg
36'	2 - 10000	8700 lbs / 3946 kg

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights



AIR RIDE SUSPENSION AVAILABLE



# 8" I-Beam Deckover

# F8

NOW EQUIPPED WITH  
**DEXTER AXLES**




**Lengths**  
16' - 26'

## Standard Features

- Front Toolbox (GN Only)
- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Adjustable Ball Coupler
- Safety Chains
- 1 - Drop Leg Jack (10,000 lb.)
- 2 - Dexter EZ-Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray
- 6' 6" Slide in Ramps w/ Holders
- 8" x 10 lb. I-Beam Tongue
- 8" x 10 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 96" Wide Deck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

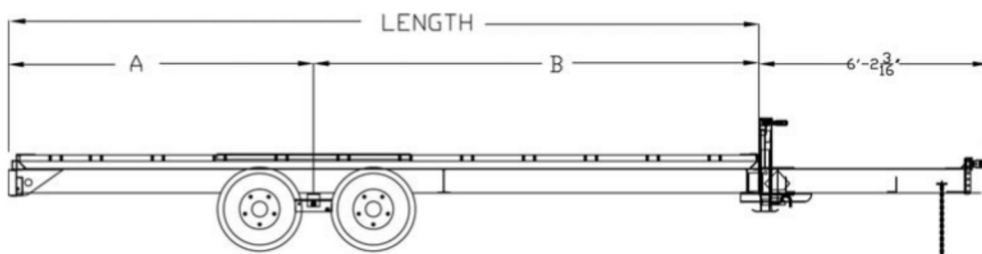

8" I-Beam Deckover		
Length	A	B
16'	77"	115"
18'	86"	130"
20'	92"	148"
22'	102"	162"
24'	112"	176"
26'	114"	198"

Also Available with a Gooseneck Coupler



## Weights

Length	Axles	Est. Base Weight†
16'	2 - 7000	3200 lbs / 1451 kg
18'	2 - 7000	3400 lbs / 1542 kg
20'	2 - 7000	3600 lbs / 1633 kg
20' GN	2 - 7000	4100 lbs / 1860 kg

Length	Axles	Est. Base Weight†
22'	2 - 7000	3820 lbs / 1733 kg
24'	2 - 7000	4060 lbs / 1842 kg
26'	2 - 7000	4340 lbs / 1969 kg

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

## Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) \*
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Round (25,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 5,200# Electric / Spring
- (3) 5,200# Electric / Spring
- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (3) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Oil Bath Axles w / 235-80 Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric / Spring

## Tail Options

- Straight Deck w/ 6'6" Slide-in Ramps \*
- 3' Dovetail w/ 5' Slide-in Ramps (18" and up)
- 3' Dovetail w/ 2, 16"x60" Foldup Ramps
- 3' Dovetail w/ 3, 16"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66" Foldup Ramps
- 5' dove with 2 Flipover Ramps (Must Have R option)
- 3' Dovetail w/ 3 31"x66" Foldup Ramps
- 3' Dovetail w/ 2 16"x60" Dbl Hinge Foldup Ramps
- 5' Dove w/ 5' Slide-in Ramps (Must Have R option)
- 3' Dovetail w/ 3 16"x60" Dbl Hinge Foldup Ramps
- 4' Dove with 2 Flipover Ramps
- 4' Dove with 3 Flipover Ramps
- 5' Dove with 3 Flipover Ramps (Must Have R option)
- 5' Dove 3 31"x66" Fld Up Rmp.(Must Have R opt.)
- 3' Dovetail w/ Split Heavy Duty Gate
- 3' Dovetail w/ Heavy Duty Gate
- 4' Dove with 4ft Monster Ramps
- 5' Dove 2 31"x66" Fld Up Rmp.(Must Have R opt.)

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Decking
- 9,990 G.V.W.R.
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- 2nd Jack
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- Mount Only for Spare Tire
- 1/4" Diamond Plate Steel Floor
- Steel Floor & 4 D-Rings
- Front Toolbox (Bumper Pull)
- 102" Deck Width
- Rear Support Jacks (Dovetail and 96" Only)
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)

\* Standard Feature

² Special Order Option: Requires additional lead-time

# POWER TAIL

PATENT PENDING



The Power Tail is a hydraulic powered trailer tail that replaces typical trailer ramps with a 100% powered ramp system. This allows you to make the trailer ready to load and unload at the touch of a button. The tail rotates a full 180 degrees to serve both as a tail for loading and deck for storing cargo.

The PJ Power Tail is easier, safer, faster, and more reasonably priced than anything else on the market.

## **Never Lift Another Ramp**

Gone are the days of physically flipping multiple ramps then carefully adjusting their position to load your equipment. With the touch of a button you will be able to quickly raise and lower the entire tail, saving your back and your time

## **Tail Lays Flat to Extend the Deck**

In the closed position the tail is completely flat, allowing equipment & cargo to be loaded on top of the diamond plate on the Power Tail. This also reduces wind drag significantly compared to stand-up ramps.

## **Confidence Inspiring & Safe**

The super wide Power Tail gives you the confidence to load and unload equipment without the fear of missing a ramp. The angle cross-members are used on both the dovetail and Power Tail to maximize traction in all-weather situations. Also, the knife edge tail eliminates the initial "bump" when loading that can cause wheel spin.

## **Shorter and Lighter**

Since the tail folds flush to the deck, you don't have to worry about the 4-5 ft of tail overhang that is common on hydraulic dovetails. This fold-over tail and single cylinder design keep the Power Tail short and relatively light to maximize payload capacity. This allows the Power Tail to be installed on short 14k single wheel goosenecks (20 feet) all the way up to triple axle stepdeck trailers as long as 53 feet.

## **Smart & Highly Efficient Design**

The Power Tail (patent pending) uses a single hydraulic cylinder to rotate the tail a full 180 degrees. This ingenious tail design is very mechanically efficient, using just a few moving parts with no wasted movement. This greatly reduces the overall cost and weight of the Power Tail.





### Other Benefits

- Self-cleaning angle dovetail & tail allows dirt to easily pass through
- Knife-edge tail eases the loading of small wheel/low clearance vehicles & equipment
- Heavy duty tail built for loading heavy equipment
- Diamond plate tail cover offers snag-free platform for cargo
- Includes self-contained KTI hydraulic pump system with wired remote (wireless remote available)
- Tail is spring assisted for smooth operation
- Faster than hydraulic dovetail
- Quieter than flip-over ramps (stops ramp bounce)
- Includes ramp support arms for upright storage
- Tail evenly distributes weight when loading, preventing the tail from "burying up" or damaging turf
- Includes an integrated flush-mount 110v battery charger to plug into wall outlet
- Works with all available suspension choices (Air, Torsion, Spring, Hutch)

### Power Tail Specifications

Models Available: FS, FD, LD, & SD

Tail footprint: 72" long x 94" wide tail footprint

Tail cover material: 11 gauge diamond plate

Cross-members: 2" x 2" x 3/16" angle

Ramp Gussets: 10 gauge formed steel

Total Estimated Weight of Power Tail Option: 1100 lbs  
(includes tail, box, cylinder, battery, etc)



### Models with Power Tail Option Available

**FS**



Classic Flatdeck  
with Singles (FS)

**LS**



Low-Pro Flatdeck  
with Singles (LS)

**FD**



Classic Flatdeck  
with Duals (FD)

**LD**



Low-Pro Flatdeck  
with Duals (LD)

**SD**



Step Deck  
Trailer (SD)

# Flatdeck Options Guide

(some options not shown, please view the product page for a list of all options)

## Tail Options



Straight Deck w/ 8' Slide-in Ramps



5' Dovetail w/ 2 Flip-Over Ramps



5' Center Pop-up Dove w/ 2 Flip-Over Ramps



5' Dovetail w/ 3 Flip-Over Ramps



**MONSTER**  
RAMPS

## Color Options



Black Powder Coat



Eq. Yellow Powder Coat



Grey Powder Coat




White Powder Coat



Red Powder Coat

## Other Options



12" oc Crossmembers



D-Rings



Rough Oak Floor



Weld On Strap Ratchets (2)



Underframe Tie Down Flat



72" Axle Spread




Sliding Strap Ratchets



Steel Floor & 4 D-rings



2 Speed Jacks



Diamond Plate Ramp Bottoms



Torque Tube



Deck On The Neck



Side-Mount Toolbox



Wood Rack



**TRAILER FLEX** TrailerFlex Air Ride Suspension



## PJ TRAILERS

- #1 Professional Grade Open Trailer Manufacturer
- Broad Line of Dumps, Flatdecks, Utilities, Tilts & Equipment Trailers
- Over 300 Independent PJ Trailers Dealer Locations in the US & Canada

Visit Us Online at [www.pjtrailers.com](http://www.pjtrailers.com)